





R2



AC900

Quick Start Guide

• R2

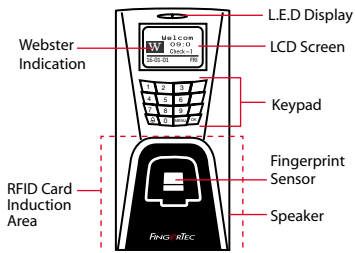


Quick Start Guide

The Quick Start Guide is intended to provide the user with simple instructions on how to setup the terminal date/time and communication as well as to perform fingerprint and card enrollment and verification. For more details on other topics of terminal management, refer to the terminal's hardware user manual available in the package or online at

- <http://info.fingertec.com/r2-4>
- <http://info.fingertec.com/ac900-4>

• AC900

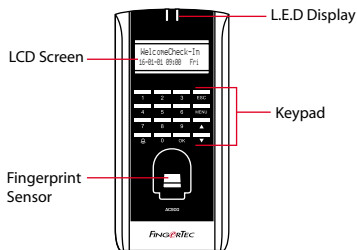

1 Setting the Date and Time

1. Press **Menu**, go to **Options** and select **System Options**.
2. Select **Date/Time**, insert the correct value and press **OK** to save the settings.

2 Enrolling Fingerprints

1. Press **Menu**, go to **User Manage** and select **Enroll User**.
2. Select **Enroll FP** and press **OK** when you see "New Enroll?".
3. Key in a **User ID**, scan the finger 3 times according to the instructions.
4. Press **OK** to save, and **Esc** to return to the main screen.

3 Enrolling Card Users

1. Press **Menu**, go to **User Manage** and select **Enroll User**.
2. Select **Reg RFID** and press **OK** when you see "New Enroll".
3. Key in a **User ID**, and wave the card at the induction area until the card ID is displayed on-screen.
4. Press **OK** to save, and **Esc** to return to the main screen.

4 Communication Settings

Press **Menu** > **Option** > **COM opt** > Set value for IP / Subnet mask / Gateway / Dev ID > **OK** to save > **Restart** to apply changes.

Default set value:

IP address - 192.168.1.201
Subnet mask - 255.255.255.0
Gateway - 192.168.1.1
Dev ID - 1
Password - 0

Software Roadmap



1

Installation


The FingerTec Ingress software installer is available in a DVD that comes with all FingerTec terminals. Complete the installation.

2

Online Activation

Use the terminal's serial number to activate your software online. Contact your local reseller or support@fingertec.com if you require offline software activation.

3 System Overview

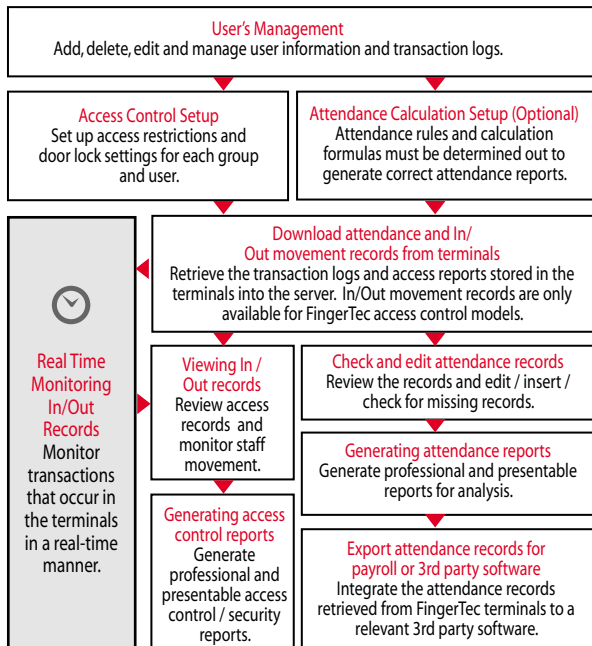

All complete hardware and software user guides are available in the FingerTec DVD and downloadable online at <http://user.fingertec.com>

© 2016 Timetec Computing Sdn Bhd. All rights reserved • 062016